




## SAFETY FILMS

### VISUAL 60 VISUALIZATION TAPE

#### INDOOR INSTALLATION

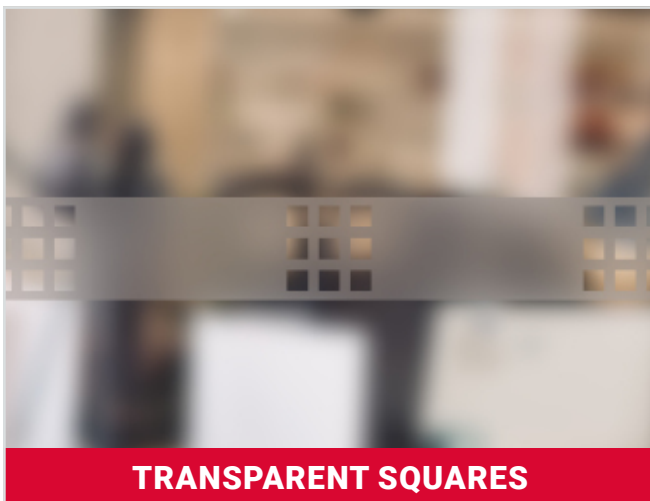

#### MANDATORY IN PUBLIC PLACES

These visualization films make it possible to highlight the glazing of partitions in public places (administrations, schools, museums, etc.)

It is **recommended** to place the horizontal strips between **1.10m** and **1.60m** high.



**Durability:** 12 to 15 years for a vertical application in Central Europe.



**Use:** decoration / signage.



**Maintenance :** after 30 days with a usual cleaning solution (non abrasive, without ammonia...). Cleaning products that could scratch are not recommended.



**Storage:** 2 years from delivery. This film must be stored away from excessive humidity and sunlight, at a temperature below 38°C.

In order to meet high standards, we recommend that you do not mix films from different productions

#### INFORMATION

**SUPPORT :** .....PET  
**ADHESIVE :** .....Acrylic polymer  
**THICKNESS :** .....23 microns  
**PROTECTOR :** .....Siliconized PET 23 microns  
**COLOR :** .....Frosted  
**APPLICATION SIDE :** ..... Internal  
**T° D'APPLICATION :** .....min + 5°C  
**STANDARDS :** .....EUROCLASSES  
**GUARANTEE :** .....10 years internal\*

*\*For glazing not exposed to the sun*

#### DIMENSIONS

By roll :



10m x

5 cm  
10 cm

Application  
Note



Video of the  
installation



#### Method of application

The surface to be bonded must be free of dust, grease or any other contaminant. Some materials such as polycarbonate can cause bubbling problems. A compatibility test is therefore recommended. Possibility to install on plexiglass and polycarbonate.

#### Production monitoring and standards

In order to constantly improve our productions, we may have to modify without notice the colors and manufacturing processes. We recommend to our users, before applying our films, to make sure that they are exactly suitable for the intended use and to comply with the standards in force.