



Solar  Screen

FUTURA

Design
Decorative - Gradation

Description

With its degraded wave motif, the self-adhesive Futura film will give a touch of the avant-garde to your windows and glass partitions.



Discover the product
through video

Characteristics



Warranty
5 years



Fire Resistance Rating
M1



Storage in recommended conditions
3 years



REACH / RoHS
Compliant



Widths Available
152 cm



Installation Type
Interior



Color From the Outside
Depoli



Length
30.5 m



Product Carbon Footprint (LCA)
1.26 kgCO₂e/m²

Construction

- 1 High optical quality polyester with printed design
- 2 PS adhesive, polymerizes with glass within 15 days
- 3 Protection PET release liner, disposable after installation



Composition
PET



Thickness
40 µm

Optical and solar properties

UV Rejection (%)	90
Visible Light Transmission (%)	min: 42 max: 85
Glue	Pressure sensitive acrylic


Application advice

Vertical situation and for a standard glazed surface

Clear Single Pane	✓
Tinted Single Pane	✓
Reflective Tinted Single Pane	✓
Clear Double Pane	✓
Tinted Double Pane	✓
Reflective Tinted Double Pane	✓
Gas-Filled Double Pane - Low E	✓
Stadip Ext. Clear Double Pane	✓
Stadip Int. Clear Double Pane	✓

✓ Yes ✗ Not recommended ! Caution

Details

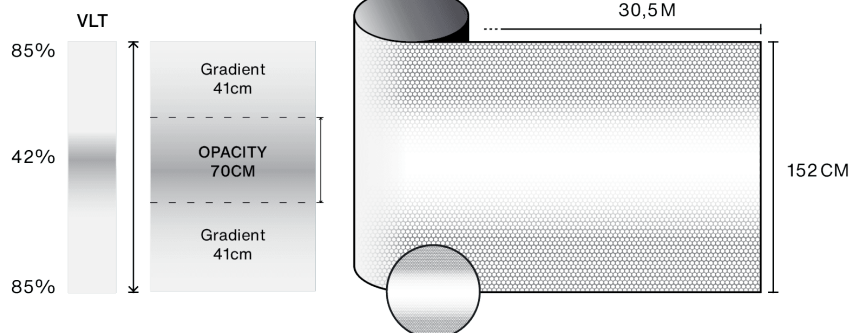

Installation and Maintenance Advise

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film.



Access the installation and maintenance advice video